

LoRaWAN®  
ACM  
CM3010

**ELSTER/HONEYWELL**



LoRaWAN® Absolute Encoder Communication Module (ACM) enables the acquisition of gas consumption data from Elster/ Honeywell Absolute Encoder AE2 and AE3 gas meters and transmits it wirelessly to the available LoRaWAN® network.

LoRaWAN® ACM is meant to be attached to the existing gas meter.

# OVERVIEW

## Efficient

LoRaWAN® ACM has bidirectional, battery powered, long range transceiver with low power consumption.

## Intelligent

Real-time absolute consumption data is gathered wirelessly and processed automatically. Data is accessible from your LoRaWAN® provider.

# APPLICATIONS

## Gas metering

Frequent reporting provides a detailed usage overview.

# FEATURES

- Long range wireless data transmission
- Absolute Encoder AE2 and AE3 reading
- Pre-installed long-life battery
- Gas metering
- Configurable reporting interval
- Maintenance free - install & forget
- Easy installation
- Average life 10 years\*
- Secure communication

\* Lifetime depends from the device location and reporting interval.

# SPECIFICATIONS

Width:	47.0 mm
Height:	102.0 mm
Length:	123.0 mm
Weight:	200g
Operating temperature:	-20°C ... +65°C
Communication range:	up to 15km*
Tx power:	up to +20dBm
Rx Senitivity:	-140dBm
MAC Layer:	LoRaWAN®
Physical Layer:	LoRa®
Body material:	PC
IP Rating:	54
Communication:	LoRaWAN®

\* Communication range is dependent on the location of the sensor and nearest base station.

# COMMUNICATION

Bit order:	LSB
Usage reporting:	Unconfirmed messages
Status reporting:	Confirmed messages

# PORT LIST

fPort	Usage	Format	Uplink	Unit	Comment
16	Gas usage	uint32_t	yes	liters	Cumulative
24	Status		yes	-	Defined below
50	Configuration		no	-	Defined below
99	Boot/Debug		yes	-	Defined below

# fPort16 gas usage

Byte 0	Byte 1	Byte 2	Byte 3
Liters (uint32)			

## Message sample

Message in base64

```
TikAAA==
```

Message decoded to hex

```
4E290000
```

HEX message flip for MSB

```
0000294E
```

HEX message converted to decimal

```
10574 (liters)
```

# fPort 24 Status Message

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7
Usage counter (uint32)				Battery Offset (int8)	Temperature °C (int8)	Sensor RSSI dBm (int8)

## Message sample

### Message in base64

```
EQAAAE4kqgYE
```

### Message decoded to hex

```
110000004E24AA0604
```

Usage counter 11000000 HEX message flip for MSB

```
00000011
```

HEX message converted to decimal

```
17 (liters)
```

### Battery HEX message

```
4E
```

HEX message converted to decimal

```
78
```

Offset value converted to volts

```
2.974V (see volts conversion map)
```

### Temperature HEX message

```
24
```

HEX message converted to decimal

```
36°C
```


### Sensor RSSI HEX message

```
AA
```

HEX message converted to signed decimal

```
-42 dBm
```

# fPort 50 Configuration Message

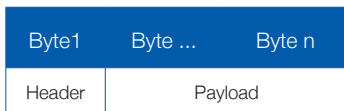

Value	Bit #	Parameter	Payload size	Type	Value	Unit	Comment
0: not sent 1: sent	0	Reporting interval	32bit	uint	3600	seconds	0 = disabled
	1	Reporting interval	32bit	uint	1000	liters	0 = disabled
	2	Status interval	32bit	uint	86400	seconds	0 = default
	3	RFU					
	4	RFU					
	5	RFU					
	6	RFU					
	7	RFU					

## Message sample

Message goal: Configure reporting interval to 600 sec & reporting interval to 400 liters

Header

Function selection

```

1 : Reporting interval (seconds) - set
1 : Reporting interval (units) - set
0 : Status interval - not set
0 : Counter - not set
0 : Temperature threshold - not set
0 : RFU
0 : RFU
0 : Functions - not set
    
```

Selection converted to binary

```
00000011
```

Selection converted to HEX

```
03
```

Reporting interval (seconds)

Converting interval 600 to HEX

258

Flip interval for LSB

58020000

Reporting interval (units)

Converting interval 400 to HEX

190

Flip interval for LSB

90010000

Compile message for sending (HEX)

03|58020000|90010000

Control value in base64 to control after sending

A1gCAACQAQAA



# fPort 51 Update message

Byte 0
Header
FF

Activate update mode for BT update for 2 minutes. if nothing is done the device will reboot, join and resume working

NB! **Only** unconfirmed messages should be used for this message.

## Message sample

Message goal: Set device to update mode

Header

Select Header HEX code

FF

Compile message for sending (HEX)

FF

Control value in base64 to control after sending

/w==

# fPort 99 Boot/Debug Message

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8	Byte 9	Byte 10	Byte 11	Byte 12
Header (HEX)	Payload										
0x00 Boot	Serial (HEX)				Firmware (HEX)			Elster meter ID (uint32)			
0x01 Shutdown											

## Message sample

Message in base64

```
ADoAAksAApiXyL8B
```

Message decoded to hex

```
003A00024B00029897C8BF01
```

Header HEX message

```
00
```

HEX translated to type

```
Boot
```

Serial HEX message

```
3A00024B
```

Flip HEX message for MSB

```
4B02003A
```

Firmware version

Major version in HEX

```
00
```

HEX value converted to decimal

```
0
```

Minor version in HEX

```
02
```

HEX value converted to decimal

```
2
```

Patch version in HEX

```
98
```

HEX value converted to decimal

```
152
```

Elster meter ID HEX message

97C8BF01

Flip HEX message for MSB

01BFC897

Convert HEX message to decimal

29345943

# BATTERY OFFSET CHART

255 - Not measured



254 - 4  
 253 - 3,95  
 252 - 3,9  
 251 - 3,85  
 250 - 3,8  
 249 - 3,75  
 248 - 3,7  
 247 - 3,65  
 246 - 3,646  
 245 - 3,642  
 244 - 3,638  
 243 - 3,634  
 242 - 3,63  
 241 - 3,626  
 240 - 3,622  
 239 - 3,618  
 238 - 3,614  
 237 - 3,61  
 236 - 3,606  
 235 - 3,602  
 236 - 3,606  
 235 - 3,602  
 234 - 3,598  
 233 - 3,594  
 232 - 3,59  
 231 - 3,586  
 230 - 3,582  
 229 - 3,578  
 228 - 3,574  
 227 - 3,57  
 226 - 3,566  
 225 - 3,562  
 224 - 3,558  
 223 - 3,554  
 222 - 3,55



221 - 3,546  
 220 - 3,542  
 219 - 3,538  
 218 - 3,534  
 217 - 3,53  
 216 - 3,526  
 215 - 3,522  
 214 - 3,518  
 213 - 3,514

212 - 3,51  
 211 - 3,506  
 210 - 3,502



209 - 3,498  
 208 - 3,494  
 207 - 3,49  
 206 - 3,486  
 205 - 3,482  
 204 - 3,478  
 203 - 3,474  
 202 - 3,47  
 201 - 3,466  
 200 - 3,462  
 199 - 3,458  
 198 - 3,454  
 197 - 3,45  
 196 - 3,446  
 195 - 3,442  
 194 - 3,438  
 193 - 3,434  
 192 - 3,43  
 191 - 3,426  
 190 - 3,422  
 189 - 3,418  
 188 - 3,414  
 187 - 3,41  
 186 - 3,406  
 185 - 3,402  
 184 - 3,398  
 183 - 3,394  
 182 - 3,39  
 181 - 3,386  
 180 - 3,382  
 179 - 3,378  
 178 - 3,374  
 177 - 3,37  
 176 - 3,366  
 175 - 3,362  
 174 - 3,358  
 173 - 3,354  
 172 - 3,35  
 171 - 3,346  
 170 - 3,342  
 169 - 3,338  
 168 - 3,334  
 167 - 3,33  
 166 - 3,326  
 165 - 3,322  
 164 - 3,318  
 163 - 3,314  
 162 - 3,31

161 - 3,306




160 - 3,302  
 159 - 3,298  
 158 - 3,294  
 157 - 3,29  
 156 - 3,286  
 155 - 3,282  
 154 - 3,278  
 153 - 3,274  
 152 - 3,27  
 151 - 3,266  
 150 - 3,262  
 149 - 3,258  
 148 - 3,254  
 147 - 3,25  
 146 - 3,246  
 145 - 3,242  
 144 - 3,238  
 143 - 3,234  
 142 - 3,23  
 141 - 3,226  
 140 - 3,222  
 139 - 3,218  
 138 - 3,214  
 137 - 3,21  
 136 - 3,206  
 135 - 3,202  
 134 - 3,198  
 133 - 3,194  
 132 - 3,19  
 131 - 3,186  
 130 - 3,182  
 129 - 3,178  
 128 - 3,174  
 127 - 3,17  
 126 - 3,166  
 125 - 3,162  
 124 - 3,158  
 123 - 3,154  
 122 - 3,15  
 121 - 3,146  
 120 - 3,142  
 119 - 3,138  
 118 - 3,134  
 117 - 3,13  
 116 - 3,126  
 115 - 3,122  
 114 - 3,118  
 113 - 3,114  
 112 - 3,11  
 111 - 3,106

110 - 3,102  
 109 - 3,098  
 108 - 3,094  
 107 - 3,09  
 106 - 3,086  
 105 - 3,082  
 104 - 3,078  
 103 - 3,074  
 102 - 3,07  
 101 - 3,066  
 100 - 3,062  
 99 - 3,058  
 98 - 3,054  
 97 - 3,05  
 96 - 3,046  
 95 - 3,042  
 94 - 3,038  
 93 - 3,034  
 92 - 3,03  
 91 - 3,026  
 90 - 3,022  
 89 - 3,018  
 88 - 3,014  
 87 - 3,01  
 86 - 3,006  
 85 - 3,002  
 84 - 2,998  
 83 - 2,994  
 82 - 2,99  
 81 - 2,986  
 80 - 2,982  
 79 - 2,978  
 78 - 2,974  
 77 - 2,97  
 76 - 2,966  
 75 - 2,962  
 74 - 2,958  
 73 - 2,954  
 72 - 2,95  
 71 - 2,946  
 70 - 2,942  
 69 - 2,938  
 68 - 2,934  
 67 - 2,93  
 66 - 2,926  
 65 - 2,922  
 64 - 2,918  
 63 - 2,914  
 62 - 2,91  
 61 - 2,906  
 60 - 2,902  
 59 - 2,898  
 58 - 2,894  
 57 - 2,89  
 56 - 2,886  
 55 - 2,882

54 - 2,878  
 53 - 2,874  
 52 - 2,87  
 51 - 2,866  
 50 - 2,862  
 49 - 2,858  
 48 - 2,854  
 47 - 2,85  
 46 - 2,846  
 45 - 2,842  
 44 - 2,838  
 43 - 2,834  
 42 - 2,83  
 41 - 2,826  
 40 - 2,822  
 39 - 2,818  
 38 - 2,814  
 37 - 2,81  
 36 - 2,806  
 35 - 2,802  
 34 - 2,798  
 33 - 2,794  
 32 - 2,79  
 31 - 2,786  
 30 - 2,782  
 29 - 2,778  
 28 - 2,774  
 27 - 2,77  
 26 - 2,766  
 25 - 2,762  
 24 - 2,758  
 23 - 2,754  
 22 - 2,75  
 21 - 2,746  
 20 - 2,742  
 19 - 2,738  
 18 - 2,734  
 17 - 2,684  
 16 - 2,634  
 15 - 2,584  
 14 - 2,534  
 13 - 2,484  
 12 - 2,434  
 11 - 2,384  
 10 - 2,334  
 9 - 2,284  
 8 - 2,234  
 7 - 2,184  
 6 - 2,134  
 5 - 2,084  
 4 - 2,034  
 3 - 1,984  
 2 - 1,934  
 1 - 1,884  
 0 - N/A


# DIMENSIONS / PACKAGING

## Dimensions

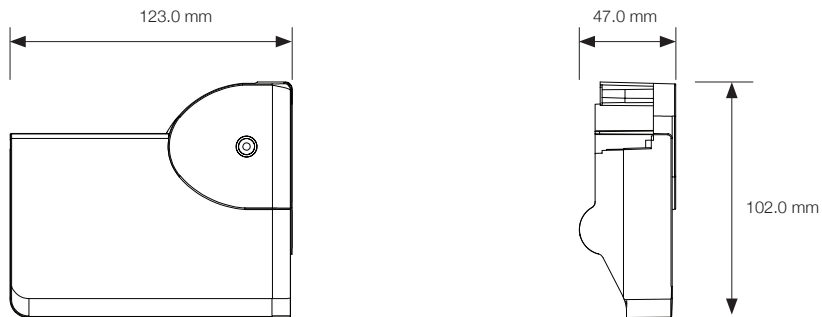

## Packaging

1 pcs box

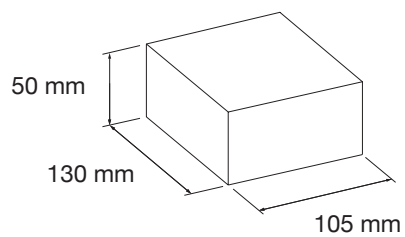

# COMPATIBILITY

## Supported protocols

AE02:04.01:01.01 (M-BUS Standard (EN 13757))

AE02:02.01:01.01 (M-BUS OMS)

AE03:05.01:01.01 ("MP" (M-BUS/SCR+ OBIS OMS))

AE03:04.01:01.01 (M-BUS - GWF)

# ORDERING INFORMATION

Article / SKU	Package qty	Frequency	Region
CM3010A#0001EU	1	868 MHz	EU
CM3010B#0001AU	1	922 MHz	AU
CM3010C#0001US	1	915 MHz	US
CM3010D#0001AS	1	923 MHz	AS
CM3010E#0001CN	1	780 MHz	CN
CM3010F#0001KR	1	922 MHz	KR
CM3010G#0001EU	1	433 MHz	EU
CM3010H#0001CN	1	470 MHz	CN
CM3010I#0001IN	1	866 MHz	IN

# CONTACT INFORMATION

Nordic Automation Systems AS

[www.nasys.no](http://www.nasys.no)

[info@nasys.no](mailto:info@nasys.no)

# REVISION HISTORY

- 1.0 - First version
- 1.1 - Added ordering details.
- 1.2 - Communication protocol & battery info added
- 1.3 - Consumption field size corrected. Compatibility added.

All content contained herein is subject to change without notice. Nordic Automation Systems reserves the right to change or modify the content at any time.