


# Modularis Module

## CM3020

### 1 INSTALLATION


Install the module on top of the water meter and fasten the screw.



### 2 SWITCHING ON

Hold the magnet against the device (see illustration below) for at least 1 second while the water is running.

- The sensor starts to initialize and the red light will flash (at least 5 seconds).
  - If the sensor failed to initialize the red light will stay on for 5 sec.
- Otherwise it will try to calibrate and register to the network and the green light is flashing (at least 5 sec).
  - If it failed to join, the red light will stay on for 5 sec.
- If it was successful, the green light will stay on for 5 sec.

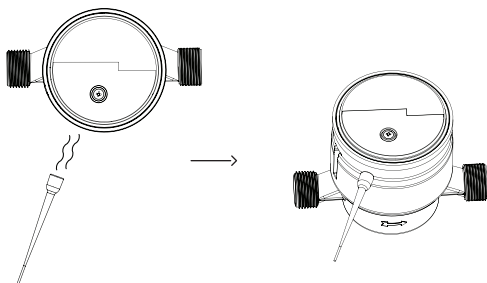

### 3 TROUBLESHOOTING

If the device did not register to the network, it can be for 2 reasons:

- The device is not allowed in the network and it must be registered with the service provider.

The necessary data is on a separate sticker in the package (DevEUI, AppEUI, AppKey). Once the device is registered repeat the switching on procedure described under point 2.

- There is no LoRaWAN reception. Contact your LoRaWAN service provider.